



RoHS HF REACH

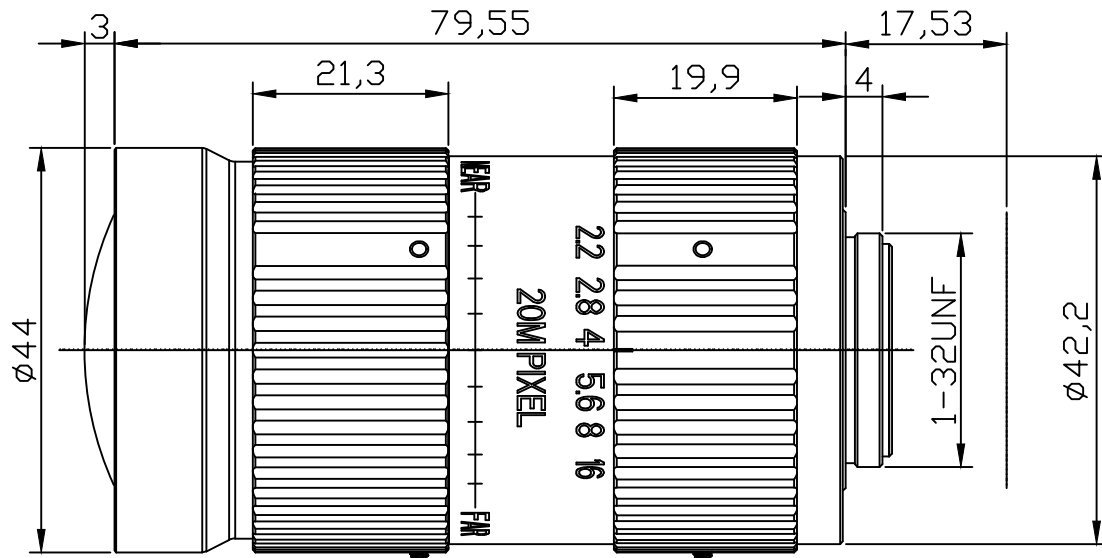

对焦固定手柄(3个孔)

光栏固定手柄(3个孔)

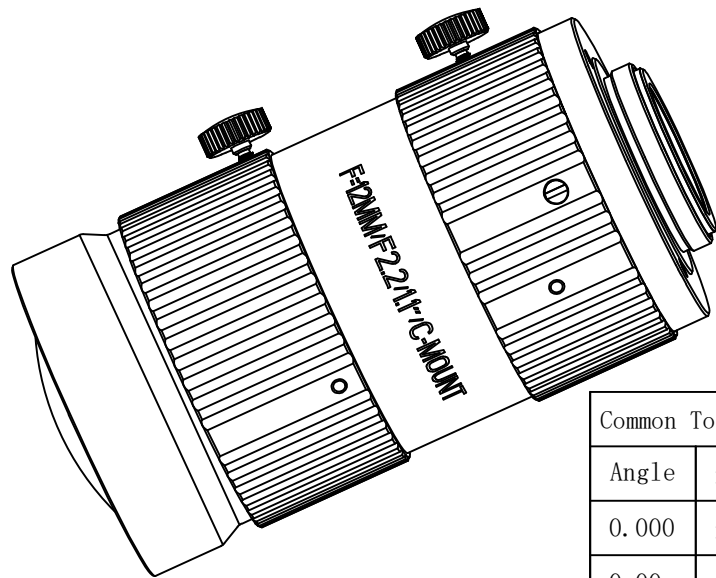

1.1" F2.2/12MM /20MEGA/C MOUNT	
FOCAL LENGTH	f=12MM
F.NO	F=1:2.2--16
FOCUS DISTANCE	0.1M---无穷远
FLANGE BACK	17.526MM IN AIR
BACK FOCUS	12.9
FILTER SCREW SIZE	M49*P0.75 (可增加)
MOUNT	C
REL. ILLUMINATION	≥70%
Front/Rear Effective Dia	Front φ38.1 Rear φ17.9

FIELD OF VIEW	SENSOR	1.1"	1"	2/3"
	D	71.4°	66.7°	49°
	H	60.4°	55.8°	40°

TV DISTORTION	<0.5%	<0.4%	<0.3%
---------------	-------	-------	-------

WORKING DISTANCE	OPTICAL MAGNIFICATION	1.1" FIELD OF VIEW	
------------------	-----------------------	--------------------	--

MM		H	V
5000	0.003X	5420.38	4065.28
2000	0.006X	2199.54	1649.66
1000	0.013X	1125.94	844.45
900	0.014X	1018.58	763.94
800	0.015X	964.9	723.68
700	0.018X	803.87	620.9
600	0.02X	696.52	522.39
500	0.024X	589.18	441.88
400	0.029X	481.8	361.4
350	0.033X	428.2	321.1
300	0.038X	374.55	280.7
250	0.044X	320.95	239.7
200	0.053X	267.4	200.56
150	0.066X	214.1	160.55
100	0.087X	161.34	121.04

外观标准	60--40
WORKING TEMPERATURE	-40°C~80°C
STORAGE TEMPERATURE	-40°C~85°C

Common Tolerance	④				
Angle	±0.5°	③			
0.000	±0.01	②			
0.00	±0.03	①			
0.0	±0.05	Rev	Description	Name	Date
0	±0.1		Design	Examine	Checked
				Approved	

Material:	
/	
3RD_ANGLE_PROJN	
Unit	mm
Scale	2:1
Ver	00
Date	2018.10.10

Cnomax Vision	
Model:	12MM-1.1"-20M-C MOUNT
Part Name:	CNV1220M
Dwg No:	