


RoHS HF REACH


2/3" F1.6/12MM /5MEGA/C MOUNT	
FOCAL LENGTH	f=12MM
F.NO	F=1:1.6--16
FOCUS DISTANCE	0.1M--1.5M
FLANGE BACK	17.526MM IN AIR
BACK FOCUS	14.04MM IN AIR
FILTER SCREW SIZE	M35.5*P0.5
MOUNT	C
REL. ILLUMINATION	≥70%
CHIEF RAY ANGLE	<8°

调焦固定螺丝 (整周3个) 光栏调节固定螺丝 (整周2个)

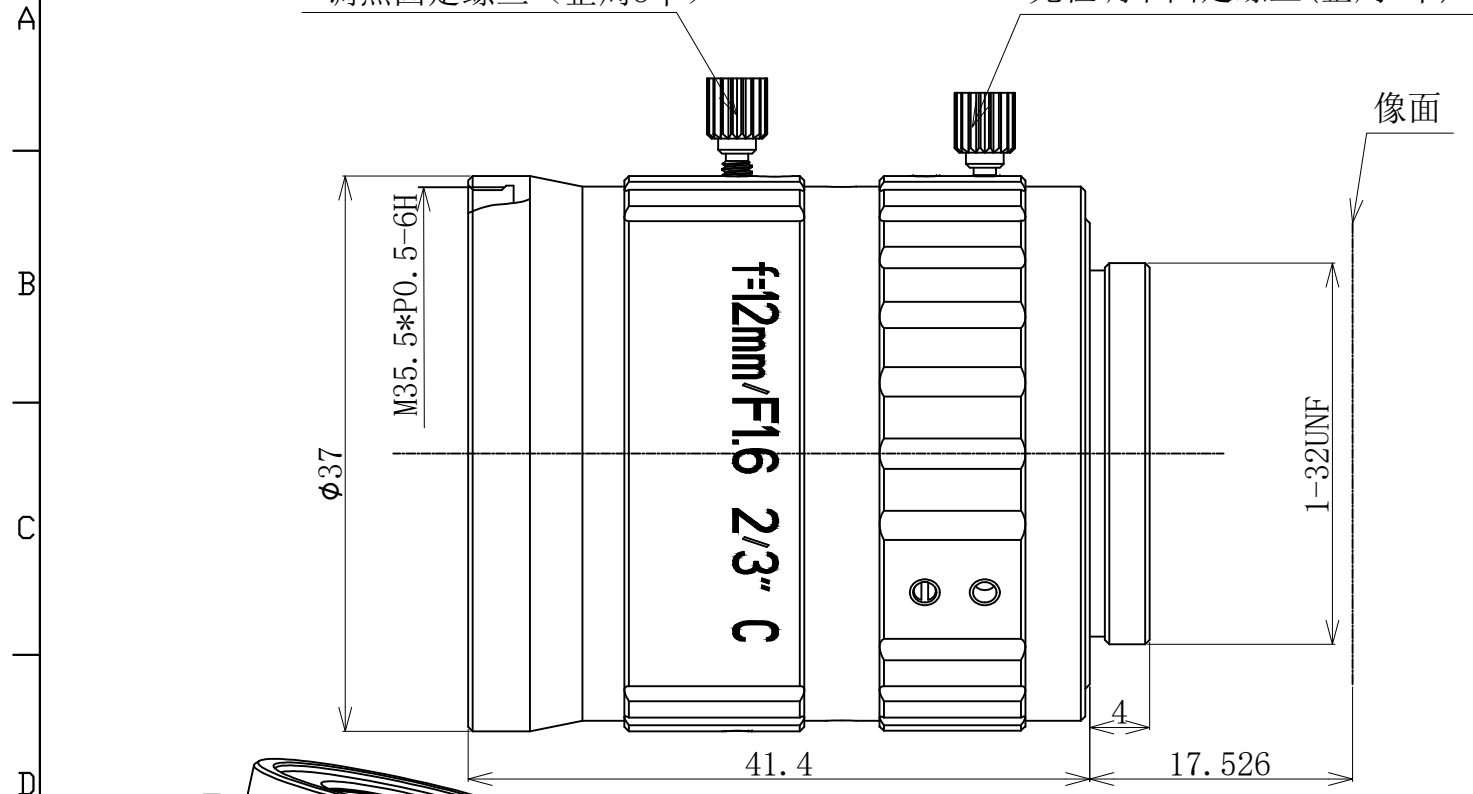

FIELD OF VIEW	SENSOR	2/3"	1/2"
	D	48.1°	36°
	H	39.4°	29.2°
	V	30.1°	22.1°
TV DISTORTION	<0.15%		<0.1%

WORKING DISTANCE	OPTICAL MAGNIFICATION	2/3" FIELD OF VIEW	
	MM	H	V
900	0.013	655.55	491.66
800	0.015	584.13	438.09
700	0.017	512.7	384.52
650	0.019	476.98	357.74
600	0.02	441.26	330.95
550	0.022	405.54	304.16
500	0.024	369.82	277.36
450	0.026	334.08	250.56
400	0.03	298.35	223.76
350	0.034	262.6	196.95
300	0.039	226.84	170.13
250	0.046	191.06	143.3
200	0.057	155.25	116.44
150	0.074	119.38	89.535
100	0.106	89.393	62.545

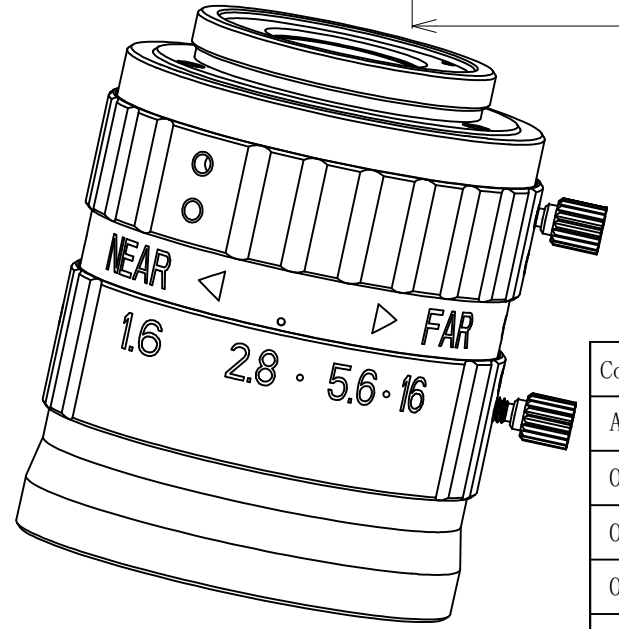

外观标准	60--40	200	0.057	155.25	116.44
WORKING TEMPERATURE	-40°C~80°C	150	0.074	119.38	89.535
STORAGE TEMPERATURE	-40°C~85°C	100	0.106	89.393	62.545

Common Tolerance		④				
Angle		±0.5°	③			
0.000		±0.01	②			
0.00		±0.03	①			
0.0		±0.05	Rev	Description	Name	Date
0		±0.1	Design	Examine	Checked	Approved

Material:	
/	
3RD_ANGLE_PROJN	
Unit	mm
Scale	2:1
Ver	00
Date	2018.03.01

Cnomax Vision	
Model:	
三分之二英寸12MM-5M	
Part Name:	
CNV125M	
Dwg No:	